

# Centrifugal Fan

Cooling fan blows air in a centrifugal course. It features high static pressure.

Related product: Splash Proof Centrifugal Fan p. 299

**Model Numbering System** Not every combination of the following codes or characters is available. Contact us for an available combination.

| 9T        | M             | 48      | P                    | 4         | H          | 01                                         |
|-----------|---------------|---------|----------------------|-----------|------------|--------------------------------------------|
| Type name | Impeller size | Voltage | PWM control function | Thickness | Speed code | Individual customer's spec (2 to 3 digits) |

## Bracket-mounted Centrifugal Fan

| 9B1T      | P             | 48      | P                    | 0         | H          | 001                                   |
|-----------|---------------|---------|----------------------|-----------|------------|---------------------------------------|
| Type name | Impeller size | Voltage | PWM control function | Thickness | Speed code | Individual customer's spec (3 digits) |

|                    |                  |       |      |      |      |      |      |
|--------------------|------------------|-------|------|------|------|------|------|
| Type name          | 9B1T 9T          |       |      |      |      |      |      |
| Impeller size (mm) | D                | G, GA | J    | M    | N    | P    | S    |
|                    | ø70              | ø175  | ø133 | ø100 | ø150 | ø221 | ø225 |
| Voltage (V)        | 12               | 24    | 48   |      |      |      |      |
|                    | 12               | 24    | 48   |      |      |      |      |
| Thickness (mm)     | 0                |       | 1    | 4    | 6    |      |      |
|                    | 69 min., 99, 119 |       | 35   | 25   | 20   |      |      |
| Speed code         | H                | G     | etc. |      |      |      |      |

**How to Read Specifications** (DC fan) The following is a sample. See respective product pages for detailed information.

| Model no.           | Rated voltage [V] | Operating voltage range [V] | Rated current [A] | Rated input [W] | Rated speed [min <sup>-1</sup> ] | Max. airflow [m <sup>3</sup> /min] [CFM] | Max. static pressure [Pa] [inchH <sub>2</sub> O] | SPL [dB (A)] | Operating temperature [°C] | Expected life [h]       |
|---------------------|-------------------|-----------------------------|-------------------|-----------------|----------------------------------|------------------------------------------|--------------------------------------------------|--------------|----------------------------|-------------------------|
| <b>9GA0412G7001</b> | 12                | 7 to 13.8                   | 0.17              | 2.04            | 13100                            | 0.36 12.7                                | 192 0.77                                         | 42           | -20 to +70                 | 40000/60°C (70000/40°C) |

|                         |                                                                                                                                                                                                                                                                        |
|-------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Rated voltage           | ..... This is the necessary voltage to drive the fan. E.g.) 12 VDC, 24 VDC, 48 VDC                                                                                                                                                                                     |
| Operating voltage range | ..... The voltage range over which fan operation is guaranteed.                                                                                                                                                                                                        |
| Rated current           | ..... The current when the fan is operating at rated voltage (at free air).                                                                                                                                                                                            |
| Rated input             | ..... The power value when the fan is operating at rated voltage (at free air).                                                                                                                                                                                        |
| Rated speed             | ..... The speed when the fan is operating at rated voltage (at free air).                                                                                                                                                                                              |
| Max. airflow            | ..... The airflow at 0 Pa static pressure when the fan is operating at rated voltage. (Measured using the double chamber method)                                                                                                                                       |
| Max. static pressure    | ..... The static pressure at 0 m <sup>3</sup> /min airflow when the fan is operating at rated voltage. (Measured using the double chamber method)                                                                                                                      |
| SPL                     | ..... A-weighted sound pressure level (SPL) when the fan operates at the rated speed.<br>For the measurement method, see the Technical Materials section in the catalog.                                                                                               |
| Operating temperature   | ..... The temperature range over which fan operation is guaranteed (Non-condensing).                                                                                                                                                                                   |
| Expected life           | ..... Service life hours that 90% of bearings will survive without failing when continuously operated at the rated voltage and 60°C temperature. Expected life at 40°C is for reference only.<br>For more information, please refer to the technical material section. |

# Ø70x20 mm


**San Ace C70 9TD** type 

## General Specifications

- Material ..... Motor case: Aluminum (Black coating), Impeller: Plastic (Flammability: UL 94V-0)
- Expected life ..... See the table below. (L10 life: 90% survival rate for continuous operation in free air at 60°C, rated voltage)  
Expected life at 40°C is for reference only.
- Motor protection function ..... Locked rotor burnout protection, Reverse polarity protection  
For details, please refer to p. 580.
- Dielectric strength ..... 50/60 Hz, 500 VAC, for 1 minute (between lead wire conductors and motor case)
- Insulation resistance ..... 10 MΩ min. at 500 VDC (between lead wire conductors and motor case)
- Sound pressure level (SPL) ..... A-weighted sound pressure level (SPL) at 1 m away from the air inlet.
- Storage temperature ..... -30 to +70°C (Non-condensing)
- Lead wire ..... ⊕Red ⊖Black ☐ Sensor Yellow ☐ Control Brown
- Mass ..... 90 g

## Specifications

 When the optional inlet nozzle (109-1106) is mounted.

The models listed below **have pulse sensors with PWM control function.**

| Model no.          | Rated voltage [V] | Operating voltage range [V] | PWM duty cycle [%] | Rated current [A] | Rated input [W] | Rated speed [min <sup>-1</sup> ] | Max. airflow [m <sup>3</sup> /min] [CFM] | Max. static pressure [Pa] [inchH <sub>2</sub> O] | SPL [dB (A)] | Operating temperature [°C] | Expected life [h]          |
|--------------------|-------------------|-----------------------------|--------------------|-------------------|-----------------|----------------------------------|------------------------------------------|--------------------------------------------------|--------------|----------------------------|----------------------------|
| <b>9TD12P6G001</b> | 12                | 10.8 to 13.2                | 100                | 1.0               | 12              | 9200                             | 1.13 39.9                                | 560 2.24                                         | 61           | -20 to +70                 | 40000/60°C<br>(70000/40°C) |
|                    |                   |                             | 20                 | 0.1               | 1.2             | 2000                             | 0.23 8.1                                 | 25 0.10                                          | 30           |                            |                            |


\* PWM frequency is 25 kHz. Models without ratings for 0% PWM duty cycle have zero speed at 0%. When control terminal is open, speed is the same as at 100% duty cycle.

Note: Max input is 12.6 W at rated voltage.


## Airflow - Static Pressure Characteristics / PWM Duty - Speed Characteristics Example

**9TD12P6G001** With pulse sensor with PWM control function


PWM duty cycle

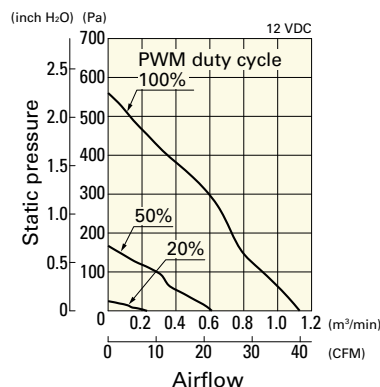


Operating voltage range

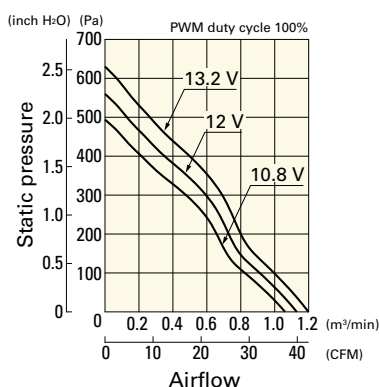


PWM duty - Speed characteristics example

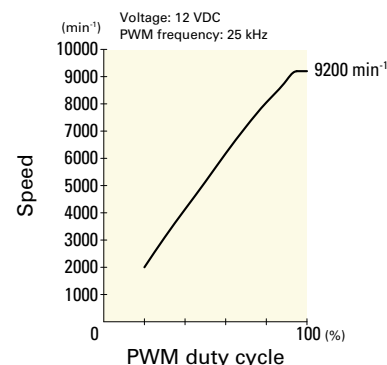


## Dimensions (unit: mm)

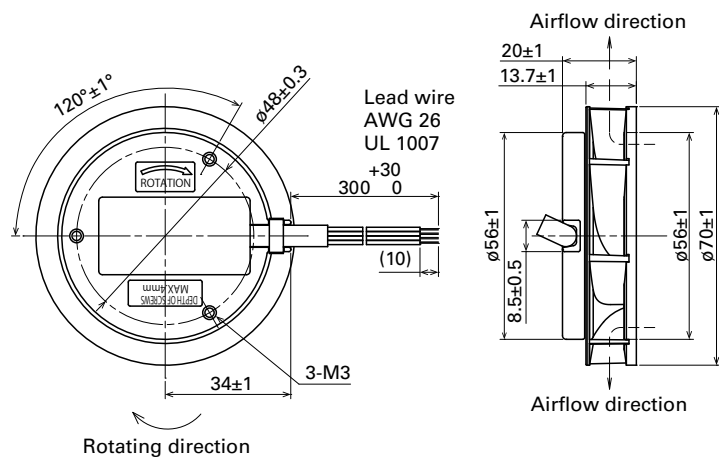

## Reference Dimensions of Mounting Holes and Vent Opening (unit: mm)

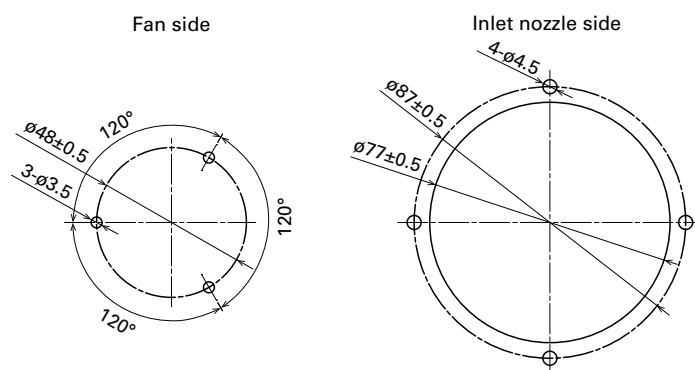

## Reference Diagram for Mounting (unit: mm)

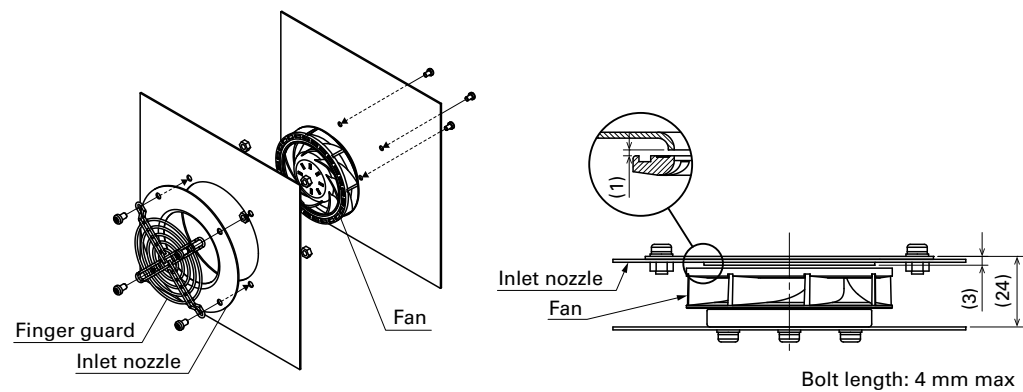

## Options

Finger guards

page: p. 564

Model no.: 109-1128

Inlet nozzle

page: p. 569

Model no.: 109-1106

# Ø100×25 mm


**San Ace C100 9TM** type 

## General Specifications

- Material ..... Motor case: Aluminum (Black coating), Impeller: Plastic (Flammability: UL 94V-0)
- Expected life ..... See the table below. (L10 life: 90% survival rate for continuous operation in free air at 60°C, rated voltage)  
Expected life at 40°C is for reference only.
- Motor protection function ..... Locked rotor burnout protection, Reverse polarity protection  
For details, please refer to p. 580.
- Dielectric strength ..... 50/60 Hz, 500 VAC, for 1 minute (between lead wire conductors and motor case)
- Insulation resistance ..... 10 MΩ min. at 500 VDC (between lead wire conductors and motor case)
- Sound pressure level (SPL) ..... A-weighted sound pressure level (SPL) at 1 m away from the air inlet.
- Storage temperature ..... -30 to +70°C (Non-condensing)
- Lead wire ..... ⊕Red ⊖Black Sensor Yellow Control Brown
- Mass ..... 150 g

## Specifications When the optional inlet nozzle (109-1080) is mounted.

The models listed below **have pulse sensors with PWM control function.**

| Model no.         | Rated voltage [V] | Operating voltage range [V] | PWM duty cycle [%] | Rated current [A] | Rated input [W] | Rated speed [min <sup>-1</sup> ] | Max. airflow [m <sup>3</sup> /min] [CFM] | Max. static pressure [Pa] [inchH <sub>2</sub> O] | SPL [dB (A)] | Operating temperature [°C] | Expected life [h]          |
|-------------------|-------------------|-----------------------------|--------------------|-------------------|-----------------|----------------------------------|------------------------------------------|--------------------------------------------------|--------------|----------------------------|----------------------------|
| <b>9TM24P4H01</b> | 24                | 21.6 to 26.4                | 100                | 0.44              | 10.56           | 6400                             | 1.77 62.5                                | 560 2.25                                         | 60           | -20 to +70                 | 40000/60°C<br>(70000/40°C) |
|                   |                   |                             | 0                  | 0.05              | 1.2             | 2000                             | 0.51 18.0                                | 48 0.19                                          | 34           |                            |                            |
| <b>9TM48P4H01</b> | 48                | 36 to 60                    | 100                | 0.22              | 10.56           | 6400                             | 1.77 62.5                                | 560 2.25                                         | 60           |                            |                            |
|                   |                   |                             | 0                  | 0.04              | 1.92            | 2000                             | 0.51 18.0                                | 48 0.19                                          | 34           |                            |                            |

\* PWM frequency is 25 kHz. Models without ratings for 0% PWM duty cycle have zero speed at 0%. When control terminal is open, speed is the same as at 100% duty cycle.


Note 1: Max input is 14 W at rated voltage.

Note 2: Sensor and control options are available for selection. Refer to the table on p. 617.


## Airflow - Static Pressure Characteristics / PWM Duty - Speed Characteristics Example

**9TM24P4H01** With pulse sensor with PWM control function


PWM duty cycle

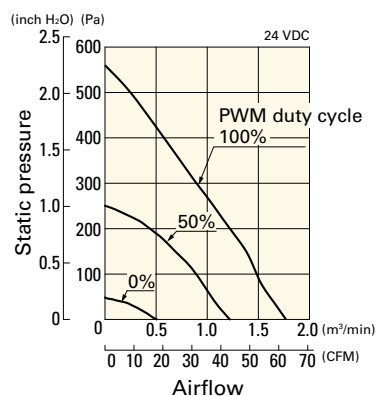

Operating voltage range

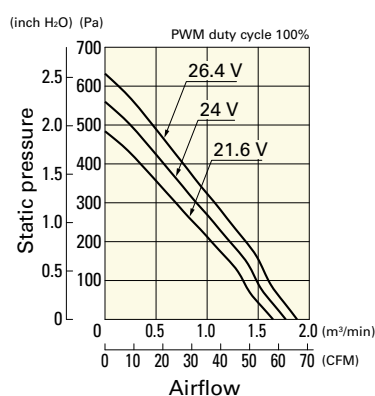

PWM duty - Speed characteristics example

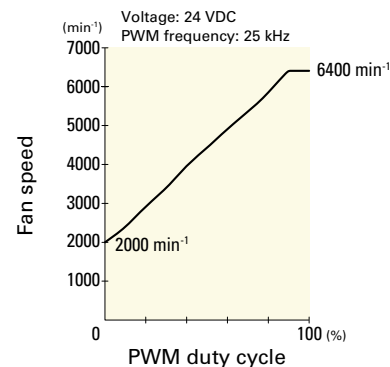



Options


Finger guards page: p. 564

Model no.: 109-099E, 109-099H

Inlet nozzle page: p. 569

Model no.: 109-1080, 109-1080H

# $\varnothing 133 \times 91$ mm


**San Ace C133 9TJ type**

## General Specifications

- Material ..... Motor case: Aluminum (Black coating), Impeller: Plastic (Flammability: UL 94V-0)
- Expected life ..... See the table below. (L10 life: 90% survival rate for continuous operation in free air at 60°C, rated voltage)  
Expected life at 40°C is for reference only.
- Motor protection function ..... Locked rotor burnout protection, Reverse polarity protection  
For details, please refer to p. 580.
- Dielectric strength ..... 50/60 Hz, 500 VAC, for 1 minute (between lead wire conductors and motor case)
- Insulation resistance ..... 10 MΩ min. at 500 VDC (between lead wire conductors and motor case)
- Sound pressure level (SPL) ..... A-weighted sound pressure level (SPL) at 1 m away from the air inlet.
- Storage temperature ..... -30 to +70°C (Non-condensing)
- Lead wire ..... ⊕Red ⊖Black Sensor Yellow Control Brown
- Mass ..... 660 g

## Specifications

When the optional inlet nozzle (109-1069) is mounted.

 The models listed below **have pulse sensors with PWM control function.**


| Model no.         | Rated voltage [V] | Operating voltage range [V] | PWM duty cycle [%] | Rated current [A] | Rated input [W] | Rated speed [min <sup>-1</sup> ] | Max. airflow [m <sup>3</sup> /min] [CFM] | Max. static pressure [Pa] [inchH <sub>2</sub> O] | SPL [dB (A)] | Operating temperature [°C] | Expected life [h]          |
|-------------------|-------------------|-----------------------------|--------------------|-------------------|-----------------|----------------------------------|------------------------------------------|--------------------------------------------------|--------------|----------------------------|----------------------------|
| <b>9TJ24P0H61</b> | 24                | 20.4 to 27.6                | 100                | 1.2               | 28.8            | 4150                             | 6.39 226                                 | 395 1.59                                         | 61           | -20 to +70                 | 40000/60°C<br>(70000/40°C) |
| <b>9TJ48P0H01</b> | 48                | 36 to 72                    | 100                | 0.55              | 26.4            | 4150                             | 6.39 226                                 | 395 1.59                                         | 61           |                            |                            |

\* PWM frequency is 25 kHz. Models without ratings for 0% PWM duty cycle have zero speed at 0%. When control terminal is open, speed is the same as at 100% duty cycle.


## Airflow - Static Pressure Characteristics / PWM Duty - Speed Characteristics Example

**9TJ24P0H61** With pulse sensor with PWM control function


PWM duty cycle

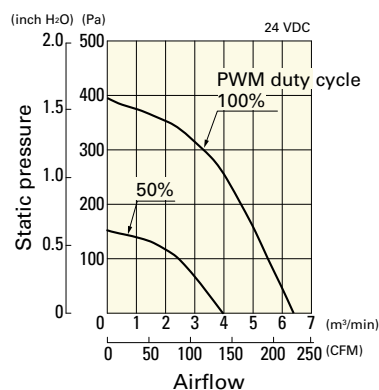


Operating voltage range

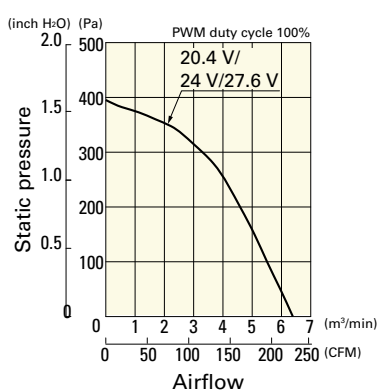


PWM duty - Speed characteristics example

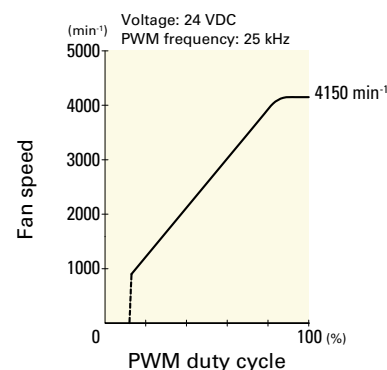
**9TJ48P0H01** With pulse sensor with PWM control function


PWM duty cycle

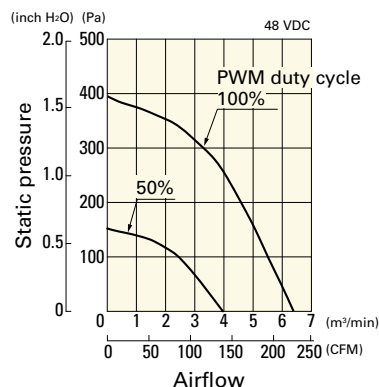


Operating voltage range

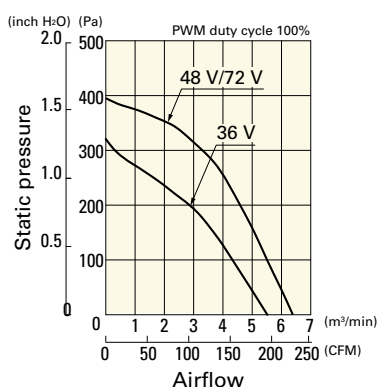

PWM duty - Speed characteristics example

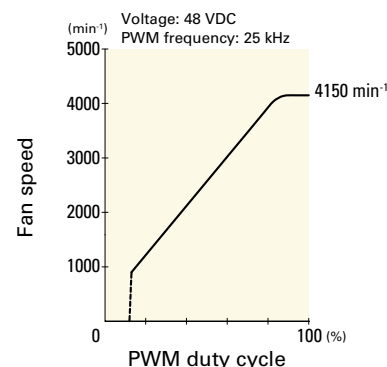

**Centrifugal Fan Ø133 mm**

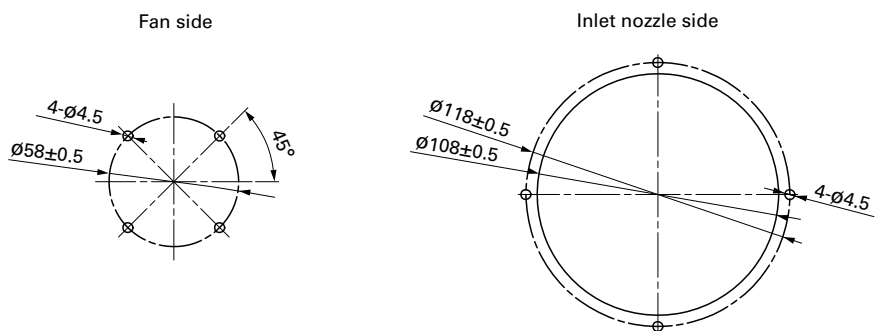

The exploded view on the left shows the assembly sequence: Inlet nozzle, Finger guard, and Fan. The side view on the right shows the fan mounted on the inlet nozzle. A circular inset labeled (2) provides a detailed view of the fan's mounting flange. The dimension 13±1 indicates the height of the fan assembly. The note 'Bolt length: 6 mm max.' specifies the maximum length for the bolts used in the assembly.

## Finger guards

Model no.: 109-1112

page: p. 569

Model no.: 109-1069, 109-1069H

# Ø150×35 mm


**San Ace C150 9TN** type **US**

## General Specifications

- Material ..... Motor case: Aluminum (Black coating), Impeller: Plastic (Flammability: UL 94V-0)
- Expected life ..... See the table below. (L10 life: 90% survival rate for continuous operation in free air at 60°C, rated voltage)  
Expected life at 40°C is for reference only.
- Motor protection function ..... Locked rotor burnout protection, Reverse polarity protection  
For details, please refer to p. 580.
- Dielectric strength ..... 50/60 Hz, 500 VAC, for 1 minute (between lead wire conductors and motor case)
- Insulation resistance ..... 10 MΩ min. at 500 VDC (between lead wire conductors and motor case)
- Sound pressure level (SPL) ..... A-weighted sound pressure level (SPL) at 1 m away from the air inlet.
- Storage temperature ..... -30 to +70°C (Non-condensing)
- Lead wire ..... ⊕Red ⊖Black Sensor Yellow Control Brown
- Mass ..... 330 g

## Specifications

When the optional inlet nozzle (109-1081) is mounted.

 The models listed below **have pulse sensors with PWM control function.**

| Model no.         | Rated voltage [V] | Operating voltage range [V] | PWM duty cycle [%] | Rated current [A] | Rated input [W] | Rated speed [min <sup>-1</sup> ] | Max. airflow [m <sup>3</sup> /min] [CFM] | Max. static pressure [Pa] [inchH <sub>2</sub> O] | SPL [dB (A)] | Operating temperature [°C] | Expected life [h]          |
|-------------------|-------------------|-----------------------------|--------------------|-------------------|-----------------|----------------------------------|------------------------------------------|--------------------------------------------------|--------------|----------------------------|----------------------------|
| <b>9TN24P1H01</b> | 24                | 20.4 to 27.6                | 100                | 0.62              | 14.9            | 3800                             | 3.83 135                                 | 410 1.65                                         | 59           | -20 to +70                 | 40000/60°C<br>(70000/40°C) |
| <b>9TN48P1H01</b> | 48                | 36.0 to 55.2                | 100                | 0.32              | 15.4            | 3800                             | 3.83 135                                 | 390 1.57                                         | 59           |                            |                            |


\* PWM frequency is 25 kHz. Models without ratings for 0% PWM duty cycle have zero speed at 0%. When control terminal is open, speed is the same as at 100% duty cycle.

Note: Max input of 9TN24P1H01: 21.4 W, 9TN48P1H01: 22 W.


## Airflow - Static Pressure Characteristics / PWM Duty - Speed Characteristics Example

### 9TN24P1H01 With pulse sensor with PWM control function


PWM duty cycle

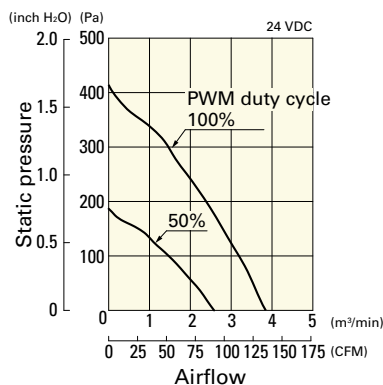

Operating voltage range

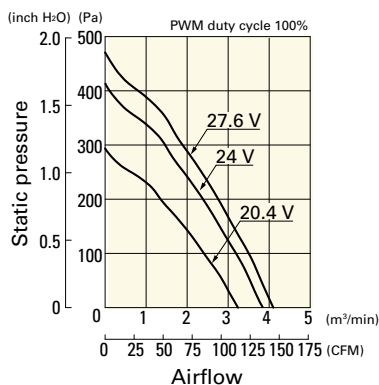


PWM duty - Speed characteristics example

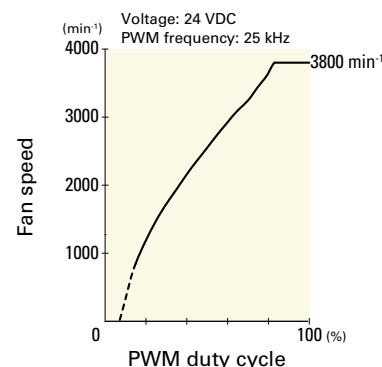


### 9TN48P1H01 With pulse sensor with PWM control function


PWM duty cycle

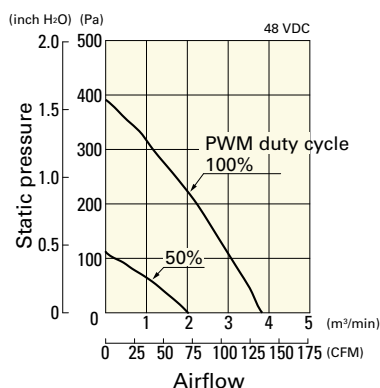


Operating voltage range

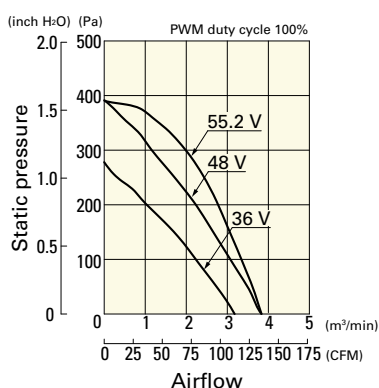


PWM duty - Speed characteristics example

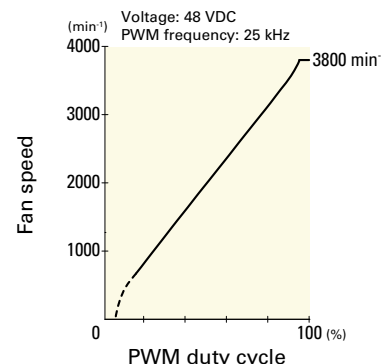


**Dimensions (unit: mm)**

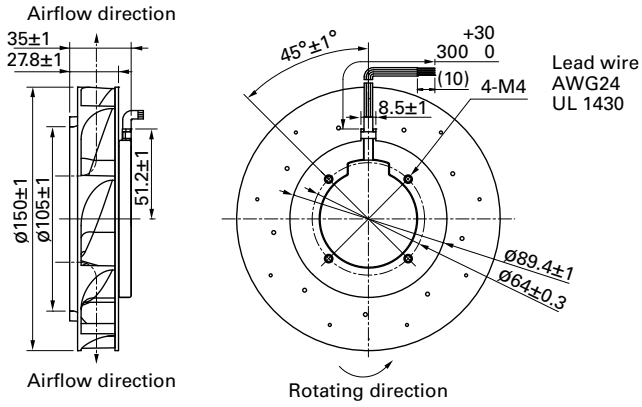

**Reference Dimensions of Mounting Holes and Vent Opening (unit: mm)**

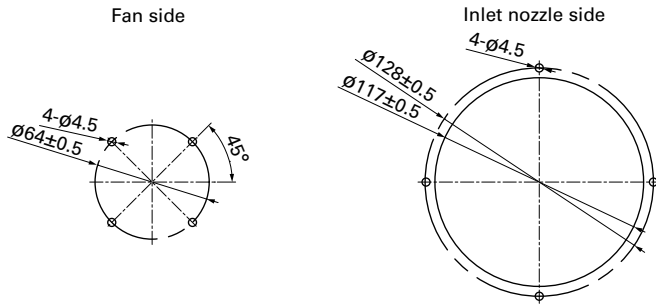

**Reference Diagram for Mounting (unit: mm)**

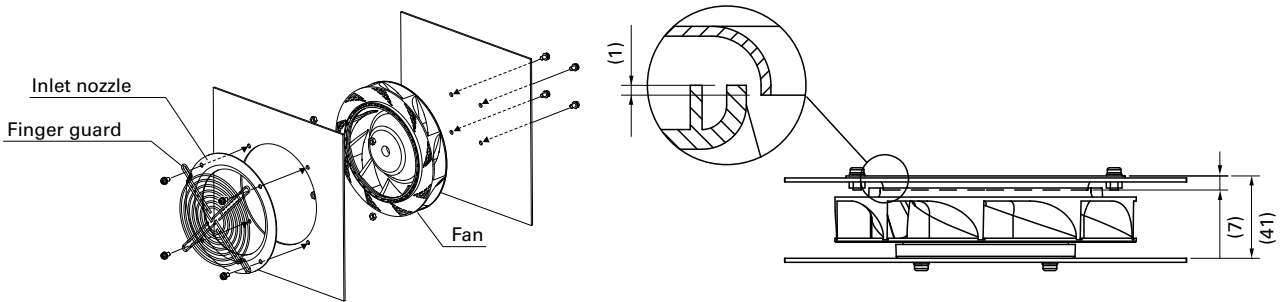


Bolt length: 4 to 6 mm.

**Options**

|                                |              |                                |              |
|--------------------------------|--------------|--------------------------------|--------------|
| Finger guards                  | page: p. 565 | Inlet nozzle                   | page: p. 569 |
| Model no.: 109-1104, 109-1104H |              | Model no.: 109-1081, 109-1081H |              |

# Ø175x69 mm


**San Ace C175 9TGA type**

## General Specifications

- Material ..... Motor case: Aluminum (Black coating), Impeller: Plastic (Flammability: UL 94V-0)
- Expected life ..... See the table below. (L10 life: 90% survival rate for continuous operation in free air at 60°C, rated voltage)  
Expected life at 40°C is for reference only.
- Motor protection function ..... Locked rotor burnout protection, Reverse polarity protection  
For details, please refer to p. 580.
- Dielectric strength ..... 50/60 Hz, 500 VAC, for 1 minute (between lead wire conductors and motor case)
- Insulation resistance ..... 10 MΩ min. at 500 VDC (between lead wire conductors and motor case)
- Sound pressure level (SPL) ..... A-weighted sound pressure level (SPL) at 1 m away from the air inlet.
- Storage temperature ..... -30 to +70°C (Non-condensing)
- Lead wire ..... ⊕Red ⊖Black Sensor Yellow Control Brown
- Mass ..... 720 g

## Specifications

When the optional inlet nozzle (109-1073) is mounted.

The models listed below **have pulse sensors with PWM control function.**

| Model no.    | Rated voltage [V] | Operating voltage range [V] | PWM duty cycle [%] | Rated current [A] | Rated input [W] | Rated speed [min <sup>-1</sup> ] | Max. airflow [m <sup>3</sup> /min] [CFM] | Max. static pressure [Pa] [inchH <sub>2</sub> O] | SPL [dB (A)] | Operating temperature [°C] | Expected life [h]          |
|--------------|-------------------|-----------------------------|--------------------|-------------------|-----------------|----------------------------------|------------------------------------------|--------------------------------------------------|--------------|----------------------------|----------------------------|
| 9TGA24P0H001 | 24                | 16 to 36                    | 100                | 4.8               | 115             | 4950                             | 15.3 541                                 | 830 3.33                                         | 77           | -20 to +70                 | 40000/60°C<br>(70000/40°C) |
|              |                   |                             | 15                 | 0.14              | 3.36            | 800                              | 2.5 88.3                                 | 21.8 0.088                                       | 38           |                            |                            |
| 9TGA48P0G001 | 48                | 36 to 72                    | 100                | 3.5               | 168             | 5700                             | 17.6 622                                 | 1100 4.42                                        | 80           |                            |                            |
|              |                   |                             | 15                 | 0.07              | 3.36            | 800                              | 2.5 88.3                                 | 21.8 0.088                                       | 38           |                            |                            |

\* PWM frequency is 25 kHz. Models without ratings for 0% PWM duty cycle have zero speed at 0%. When control terminal is open, speed is the same as at 100% duty cycle.


Note 1: Max input of 9TGA24P0H001: 210 W, 9TGA48P0G001: 325 W at rated voltage.

Note 2: The mark indicates Short LeadTime Service applicable models. See p. 630 for details.


## Airflow - Static Pressure Characteristics / PWM Duty - Speed Characteristics Example

**9TGA24P0H001** With pulse sensor with PWM control function


PWM duty cycle

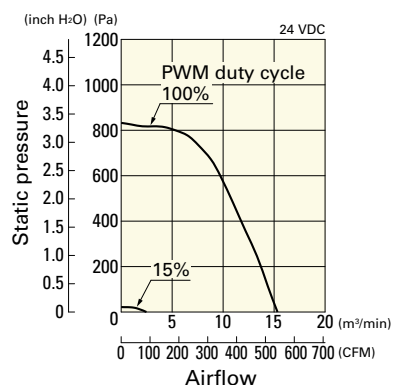

Operating voltage range

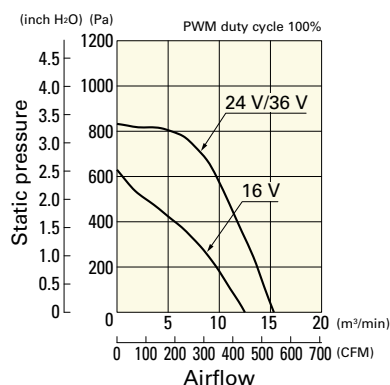


PWM duty - Speed characteristics example

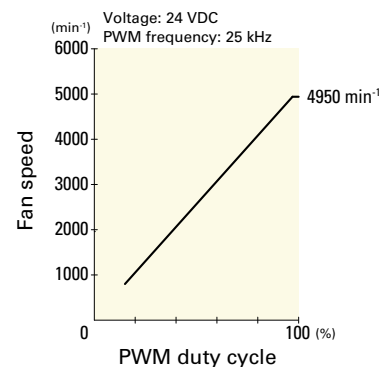


## Airflow - Static Pressure Characteristics / PWM Duty - Speed Characteristics Example

**9TGA48P0G001** With pulse sensor with PWM control function


PWM duty cycle

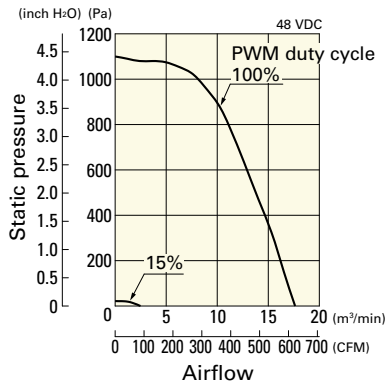


Operating voltage range

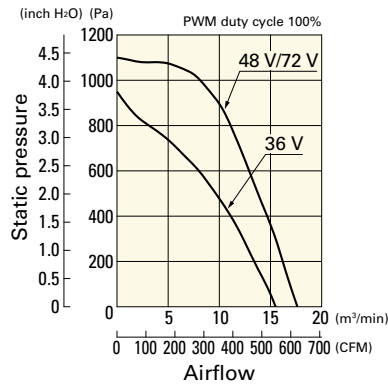


PWM duty - Speed characteristics example

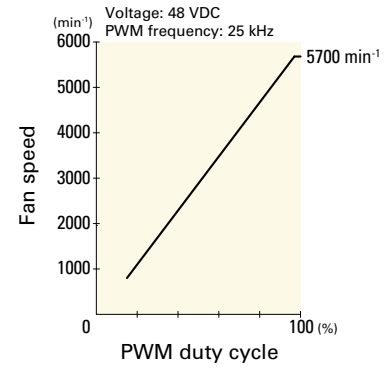

## Dimensions (unit: mm)


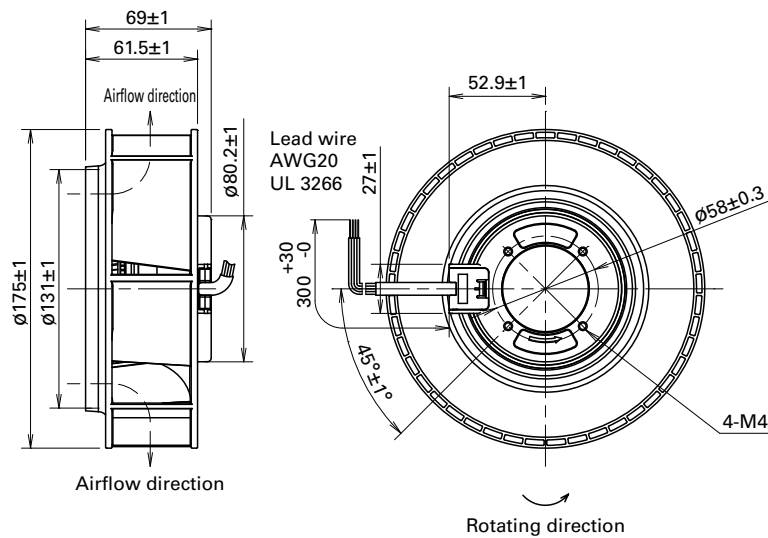


## Reference Dimensions of Mounting Holes and Vent Opening (unit: mm)

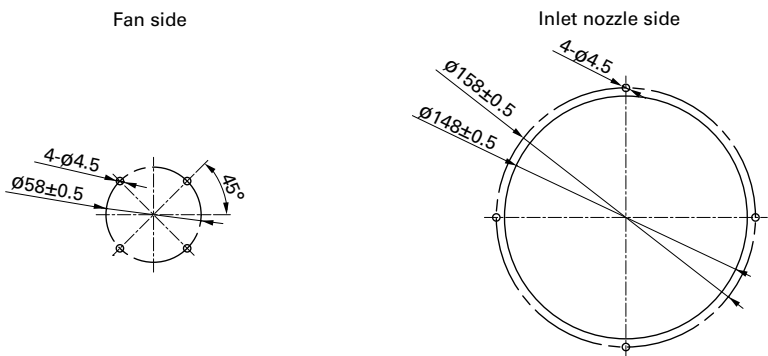

DC  
Centrifugal Fan Ø175 mm

## Reference Diagram for Mounting (unit: mm)

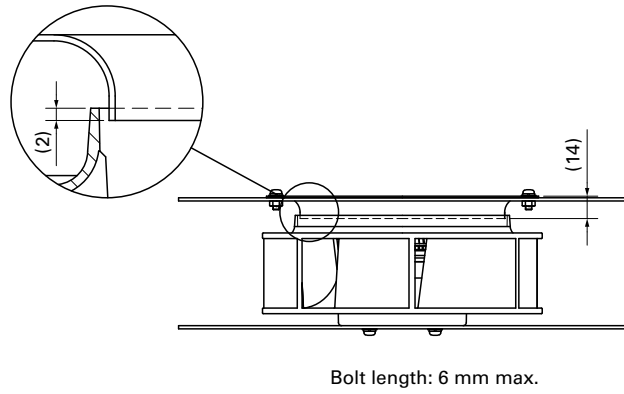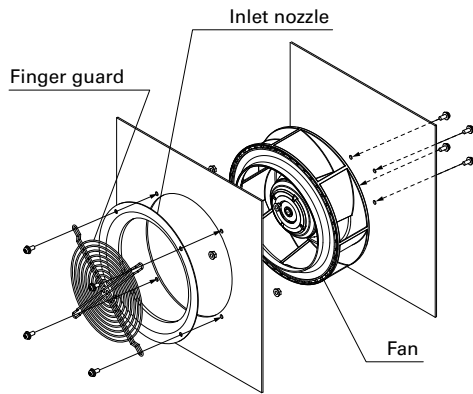

## Options

### Finger guards

page: p. 565

Model no.: 109-722, 109-722H

### Inlet nozzle

page: p. 569

Model no.: 109-1073, 109-1073H

# Ø175×69 mm


**San Ace C175 9TG** type **US**

## General Specifications

- Material ..... Motor case: Aluminum (Black coating), Impeller: Plastic (Flammability: UL 94V-0)
- Expected life ..... See the table below. (L10 life: 90% survival rate for continuous operation in free air at 60°C, rated voltage)  
Expected life at 40°C is for reference only.
- Motor protection function ..... Locked rotor burnout protection, Reverse polarity protection  
For details, please refer to p. 580.
- Dielectric strength ..... 50/60 Hz, 500 VAC, for 1 minute (between lead wire conductors and motor case)
- Insulation resistance ..... 10 MΩ min. at 500 VDC (between lead wire conductors and motor case)
- Sound pressure level (SPL) ..... A-weighted sound pressure level (SPL) at 1 m away from the air inlet.
- Storage temperature ..... -30 to +70°C (Non-condensing)
- Lead wire ..... ⊕Red ⊖Black Sensor Yellow Control Brown
- Mass ..... 750 g

## Specifications

When the optional inlet nozzle (109-1073) is mounted.

 The models listed below **have pulse sensors with PWM control function.**

| Model no.         | Rated voltage<br>[V] | Operating voltage range<br>[V] | PWM duty<br>cycle [%] | Rated current<br>[A] | Rated input<br>[W] | Rated speed<br>[min <sup>-1</sup> ] | Max. airflow<br>[m <sup>3</sup> /min] [CFM] | Max. static pressure<br>[Pa] [inchH <sub>2</sub> O] | SPL<br>[dB (A)] | Operating temperature<br>[°C] | Expected life<br>[h]       |
|-------------------|----------------------|--------------------------------|-----------------------|----------------------|--------------------|-------------------------------------|---------------------------------------------|-----------------------------------------------------|-----------------|-------------------------------|----------------------------|
| <b>9TG24P0G01</b> | 24                   | 20.4 to 27.6                   | 100                   | 3.9                  | 93.6               | 4700                                | 14.0 494.7                                  | 885 3.55                                            | 73              | -20 to +60                    | 40000/60°C<br>(70000/40°C) |
| <b>9TG24P0S01</b> |                      |                                | 100                   | 2.35                 | 56.4               | 3900                                | 11.6 409.8                                  | 609 2.45                                            | 69              | -20 to +70                    |                            |
| <b>9TG48P0G01</b> | 48                   | 36 to 55.2                     | 100                   | 1.95                 | 93.6               | 4700                                | 14.0 494.7                                  | 885 3.55                                            | 73              | -20 to +70                    |                            |

\* PWM frequency is 25 kHz. Models without ratings for 0% PWM duty cycle have zero speed at 0%. When control terminal is open, speed is the same as at 100% duty cycle.


Note 1: Max input is 130 W at rated voltage.

Note 2: Sensor and control options are available for selection. Refer to the table on p. 617.


## Airflow - Static Pressure Characteristics / PWM Duty - Speed Characteristics Example

**9TG24P0G01** With pulse sensor with PWM control function


PWM duty cycle

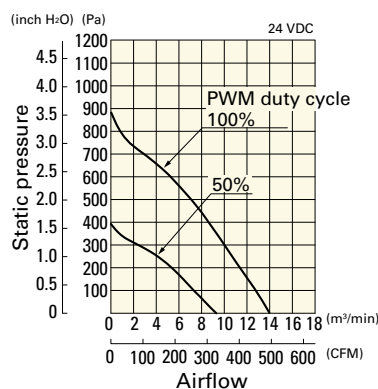

Operating voltage range

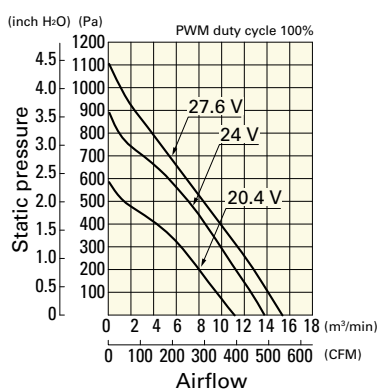


PWM duty - Speed characteristics example

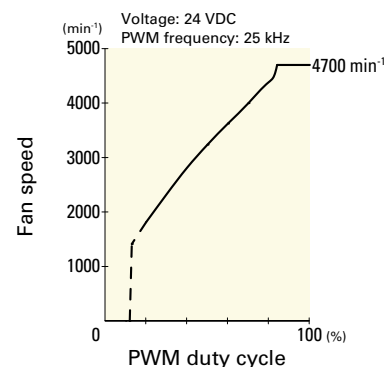




■ **Reference Dimensions of Mounting Holes and Vent Opening** (unit: mm)

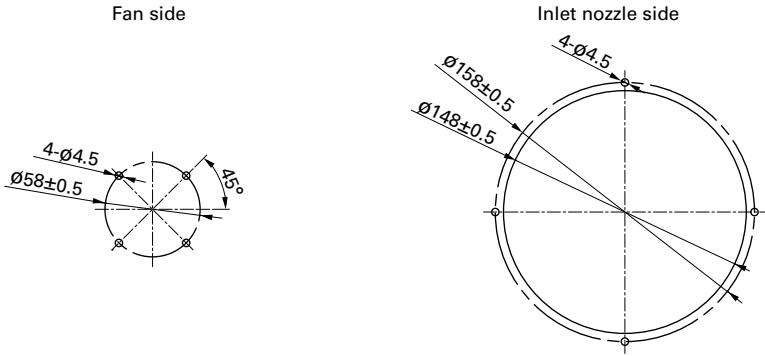

■ **Reference Diagram for Mounting** (unit: mm)

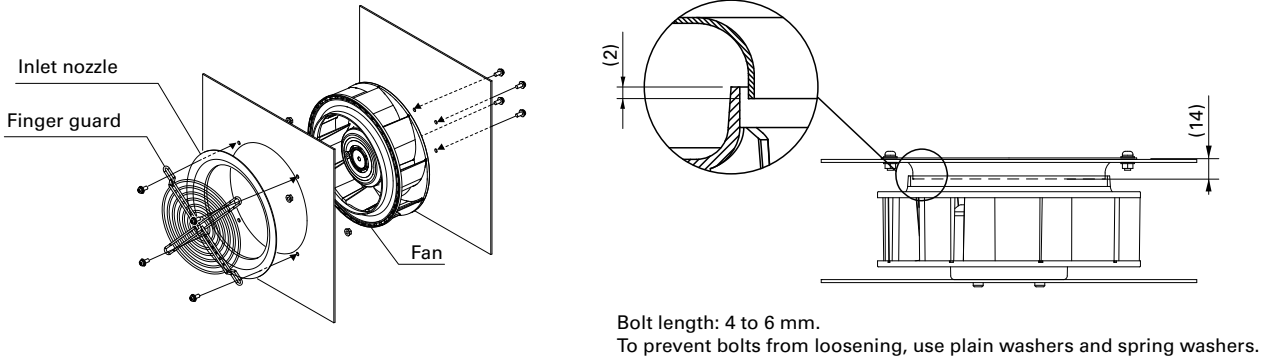

■ **Options**

Finger guards page: p. 565  
Model no.: 109-722, 109-722H

Inlet nozzle page: p. 569  
Model no.: 109-1073, 109-1073H

# Ø221×71 mm


**San Ace C221 9TP** type 

## General Specifications

- Material ..... Motor case: Aluminum (Black coating), Impeller: Plastic (Flammability: UL 94V-0)
- Expected life ..... See the table below. (L10 life: 90% survival rate for continuous operation in free air at 60°C, rated voltage)  
Expected life at 40°C is for reference only.
- Motor protection function ..... Locked rotor burnout protection, Reverse polarity protection  
For details, please refer to p. 580.
- Dielectric strength ..... 50/60 Hz, 500 VAC, for 1 minute (between lead wire conductors and motor case)
- Insulation resistance ..... 10 MΩ min. at 500 VDC (between lead wire conductors and motor case)
- Sound pressure level (SPL) ..... A-weighted sound pressure level (SPL) at 1 m away from the air inlet.
- Storage temperature ..... -30 to +70°C (Non-condensing)
- Lead wire ..... ⊕Red ⊖Black ☐ Sensor ☐ Yellow ☐ Control ☐ Brown
- Mass ..... 1050 g

## Specifications

 When the optional inlet nozzle (109-1135) is mounted.

The models listed below **have pulse sensors with PWM control function.**

| Model no.      | Rated voltage [V] | Operating voltage range [V] | PWM duty cycle [%] | Rated current [A] | Rated input [W] | Rated speed [min <sup>-1</sup> ] | Max. airflow [m <sup>3</sup> /min] [CFM] | Max. static pressure [Pa] [inchH <sub>2</sub> O] | SPL [dB (A)] | Operating temperature [°C] | Expected life [h]          |
|----------------|-------------------|-----------------------------|--------------------|-------------------|-----------------|----------------------------------|------------------------------------------|--------------------------------------------------|--------------|----------------------------|----------------------------|
| ▶▶ 9TP24P0H001 | 24                | 16 to 36                    | 100                | 3.2               | 76.8            | 3050                             | 17.6 622                                 | 530 2.13                                         | 71           | -20 to +70                 | 40000/60°C<br>(70000/40°C) |
|                |                   |                             | 15                 | 0.4               | 9.6             | 1000                             | 5.75 203                                 | 57.4 0.23                                        | 53           | -20 to +70                 |                            |
| ▶▶ 9TP48P0G001 | 48                | 36 to 72                    | 100                | 2.75              | 132             | 3650                             | 21 742                                   | 760 3.05                                         | 74           | -20 to +60                 |                            |
|                |                   |                             | 15                 | 0.2               | 9.6             | 1000                             | 5.75 203                                 | 57.4 0.23                                        | 53           | -20 to +60                 |                            |
| ▶▶ 9TP48P0H001 |                   |                             | 100                | 1.6               | 76.8            | 3050                             | 17.6 622                                 | 530 2.13                                         | 71           | -20 to +70                 |                            |
|                |                   |                             | 15                 | 0.2               | 9.6             | 1000                             | 5.75 203                                 | 57.4 0.23                                        | 53           | -20 to +70                 |                            |

\* PWM frequency is 25 kHz. Models without ratings for 0% PWM duty cycle have zero speed at 0%. When control terminal is open, speed is the same as at 100% duty cycle.




Note 1: Max input of 9TP48P0G001: 280 W, 9TP24P0H001/9TP48P0H001: 160 W at rated voltage.

Note 2: Sensor and control options are available for selection. Refer to the table on p. 617.

Note 3: The ▶▶ mark indicates Short LeadTime Service applicable models. See p. 630 for details.

## Airflow - Static Pressure Characteristics / PWM Duty - Speed Characteristics Example


### 9TP24P0H001 With pulse sensor with PWM control function

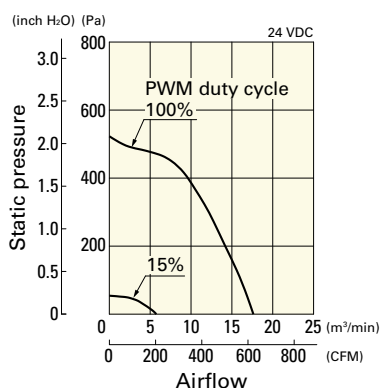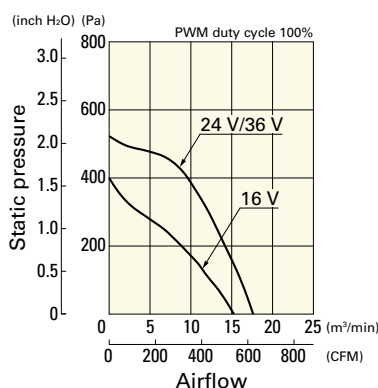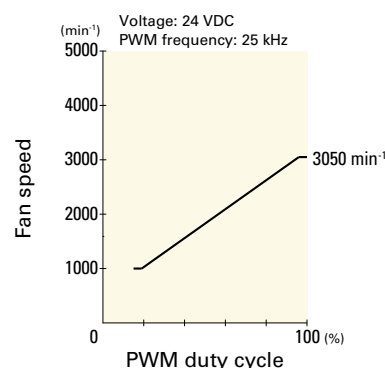**PWM duty cycle**

**Operating voltage range**

**PWM duty - Speed characteristics example**


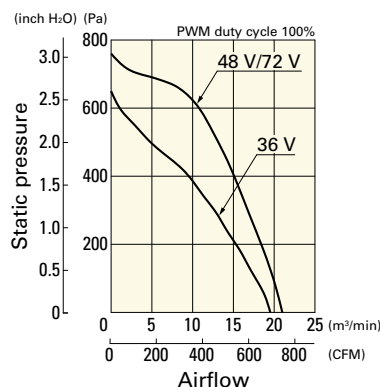
## Airflow - Static Pressure Characteristics / PWM Duty - Speed Characteristics Example

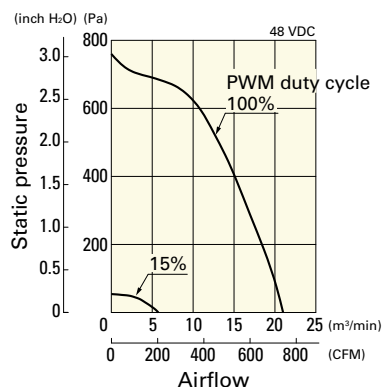**9TP48P0G001** With pulse sensor with PWM control function


PWM duty cycle



Operating voltage range




PWM duty - Speed characteristics example

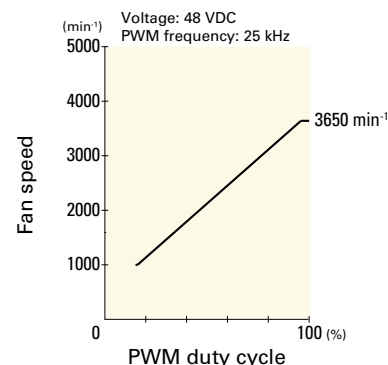


**9TP48P0H001** With pulse sensor with PWM control function


PWM duty cycle

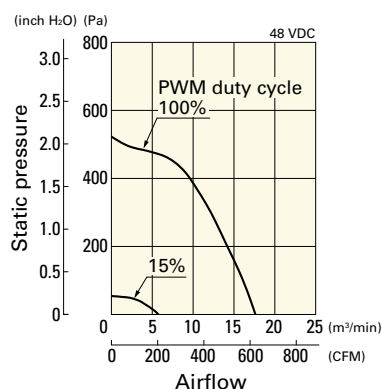


Operating voltage range

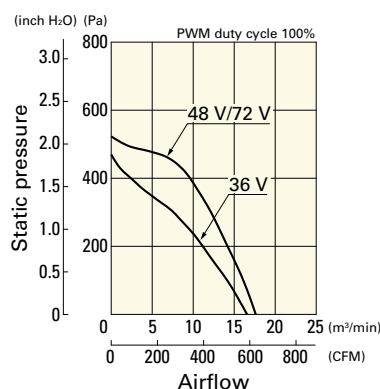


PWM duty - Speed characteristics example

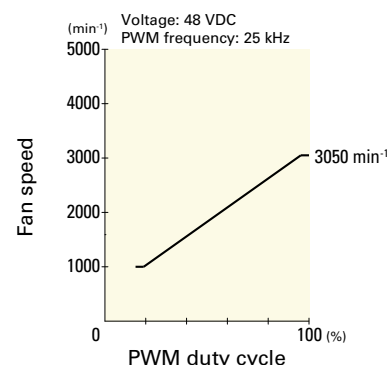


## Dimensions (unit: mm)

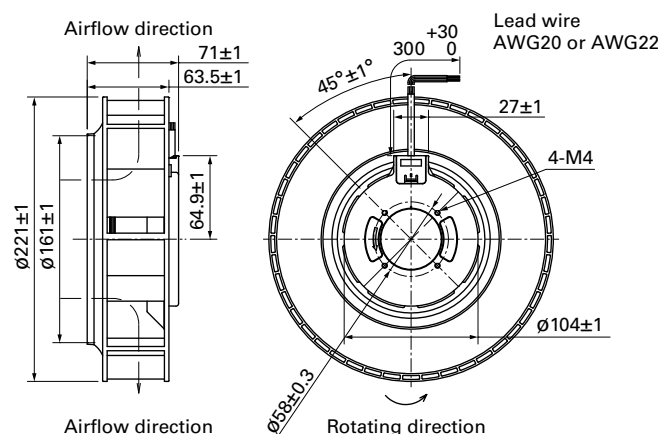

## Reference Dimensions of Mounting Holes and Vent Opening (unit: mm)

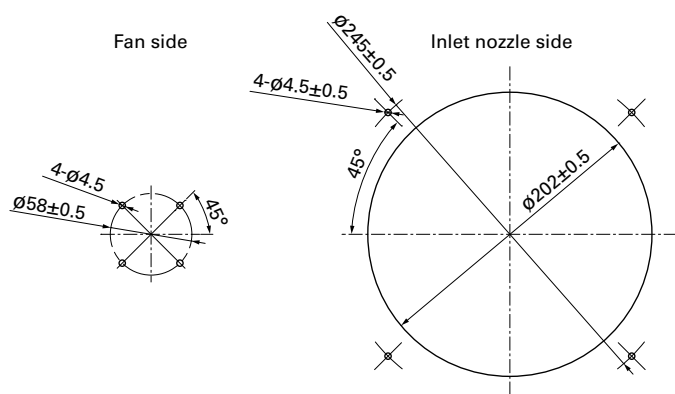

■ **Reference Diagram for Mounting (unit: mm)** Bracket-mounted model of this fan is available. For details, refer to pp. 447 to 449.

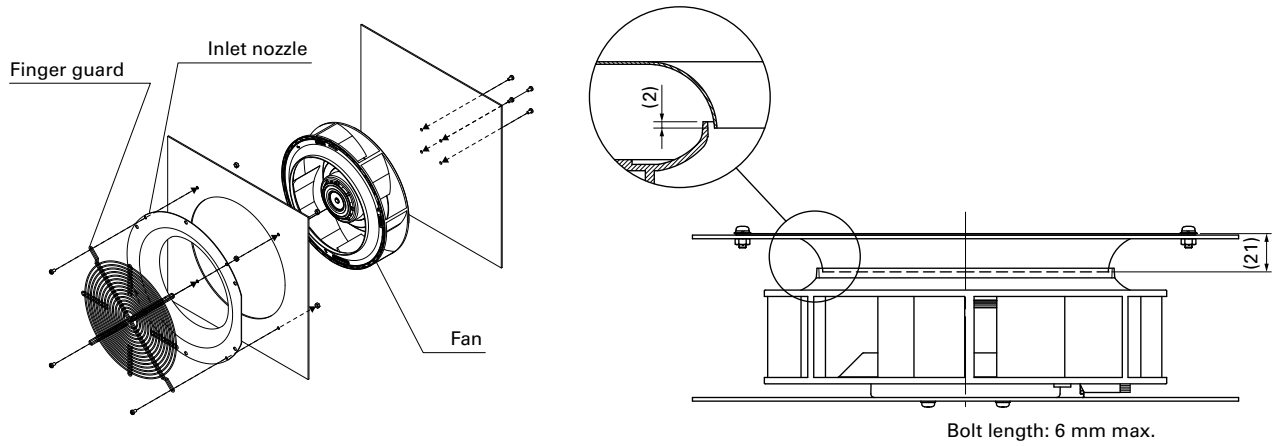

■ **Options**

**Finger guards**

page: p. 567


Model no.: 109-1138, 109-1138H

**Inlet nozzle**

page: p. 569

Model no.: 109-1135, 109-1135H

# Ø225×99 mm


**San Ace C225 9TS** type 

## General Specifications

- Material ..... Motor case: Aluminum (Black coating), Impeller: Plastic (Flammability: UL 94V-0)
- Expected life ..... See the table below. (L10 life: 90% survival rate for continuous operation in free air at 60°C, rated voltage)  
Expected life at 40°C is for reference only.
- Motor protection function ..... Locked rotor burnout protection, Reverse polarity protection  
For details, please refer to p. 580.
- Dielectric strength ..... 50/60 Hz, 500 VAC, for 1 minute (between lead wire conductors and motor case)
- Insulation resistance ..... 10 MΩ min. at 500 VDC (between lead wire conductors and motor case)
- Sound pressure level (SPL) ..... A-weighted sound pressure level (SPL) at 1 m away from the air inlet.
- Storage temperature ..... -30 to +70°C (Non-condensing)
- Lead wire ..... ⊕Red ⊖Black Sensor Yellow Control Brown
- Mass ..... 1220 g

## Specifications

When the optional inlet nozzle (109-1134) is mounted.

 The models listed below **have pulse sensors with PWM control function.**

| Model no.   | Rated voltage<br>[V] | Operating voltage range<br>[V] | PWM duty<br>cycle: [%] | Rated current<br>[A] | Rated input<br>[W] | Rated speed<br>[min <sup>-1</sup> ] | Max. airflow<br>[m³/min] [CFM] |      | Max. static pressure<br>[Pa] [inchH <sub>2</sub> O] |      | SPL<br>[dB (A)] | Operating temperature<br>[°C] | Expected life<br>[h]       |
|-------------|----------------------|--------------------------------|------------------------|----------------------|--------------------|-------------------------------------|--------------------------------|------|-----------------------------------------------------|------|-----------------|-------------------------------|----------------------------|
| 9TS48P0G001 | 48                   | 36 to 72                       | 100                    | 3.65                 | 175.2              | 3550                                | 28.1                           | 992  | 861                                                 | 3.46 | 74.5            | -20 to +60                    | 40000/60°C<br>(70000/40°C) |
| 15          |                      |                                | 0.24                   | 11.5                 | 1000               | 7.85                                | 277                            | 68.5 | 0.28                                                | 52.0 |                 |                               |                            |
| 9TS48P0H001 |                      |                                | 100                    | 2.08                 | 99.8               | 2900                                | 22.7                           | 802  | 590                                                 | 2.37 | 70.5            | -20 to +70                    |                            |
|             |                      |                                | 15                     | 0.24                 | 11.5               | 1000                                | 7.85                           | 277  | 68.5                                                | 0.28 | 52.0            |                               |                            |

\* PWM frequency is 25 kHz. Models without ratings for 0% PWM duty cycle have zero speed at 0%. When control terminal is open, speed is the same as at 100% duty cycle.

Note 1: Max input of 9TS48P0G001: 380 W, 9TS48P0H001: 200 W at rated voltage.

Note 2: The mark indicates Short LeadTime Service applicable models. See p. 630 for details.




## Airflow - Static Pressure Characteristics / PWM Duty - Speed Characteristics Example

**9TS48P0G001** With pulse sensor with PWM control function

PWM duty cycle

Operating voltage range


PWM duty - Speed characteristics example

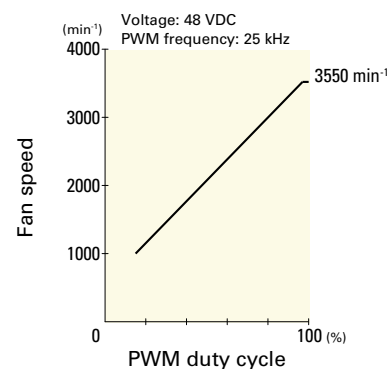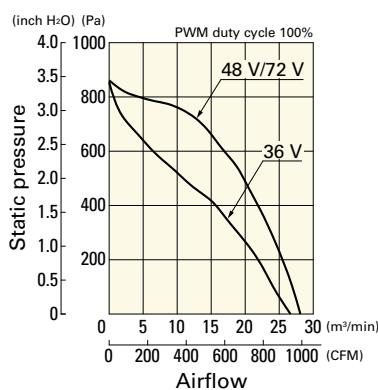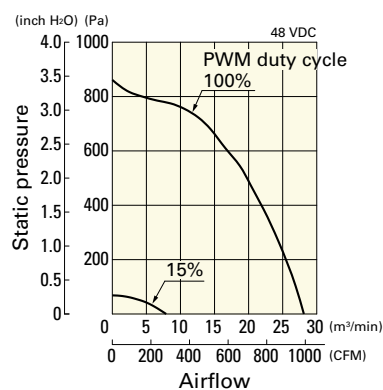


## Airflow - Static Pressure Characteristics / PWM Duty - Speed Characteristics Example

**9TS48P0H001** With pulse sensor with PWM control function


PWM duty cycle

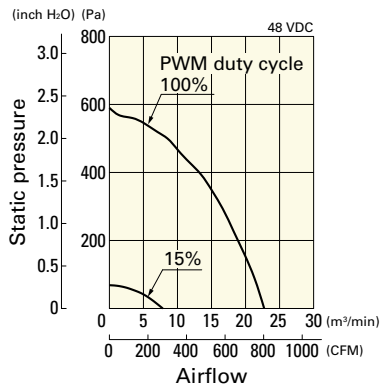


Operating voltage range

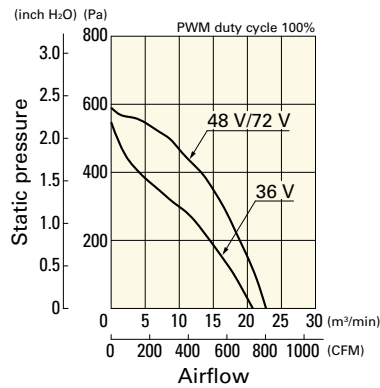


PWM duty - Speed characteristics example

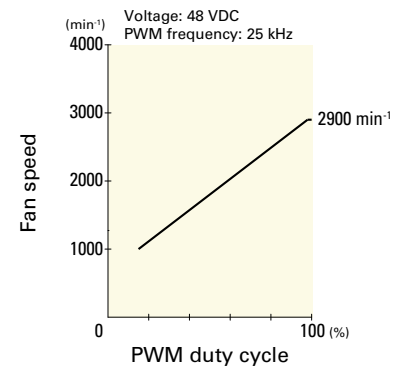

## Dimensions (unit: mm)

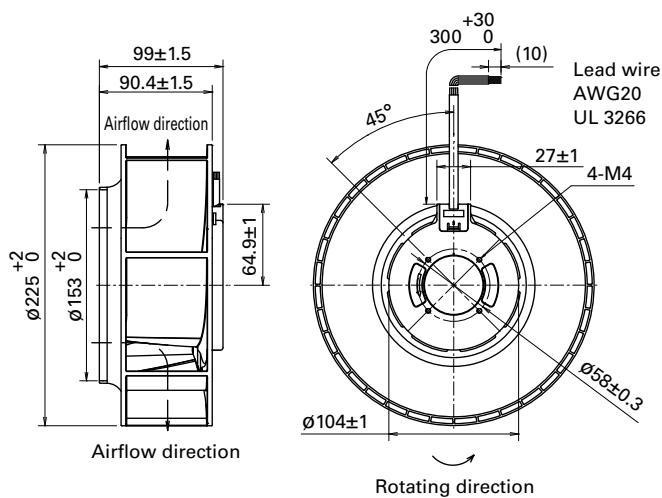


## Reference Dimensions of Mounting Holes and Vent Opening (unit: mm)

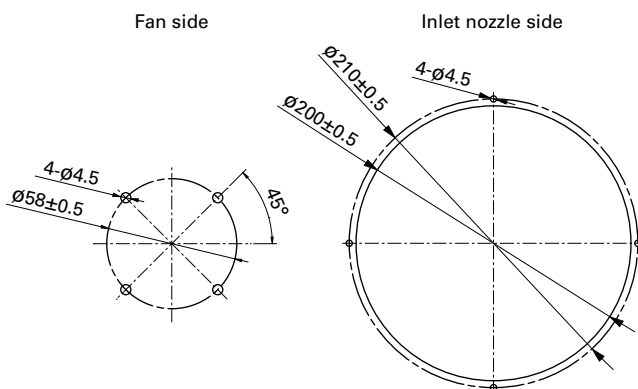

DC  
Centrifugal Fan  $\varnothing 225$  mm

**Reference Diagram for Mounting (unit: mm)** Bracket-mounted model of this fan is available. For details, refer to pp. 450 to 452.

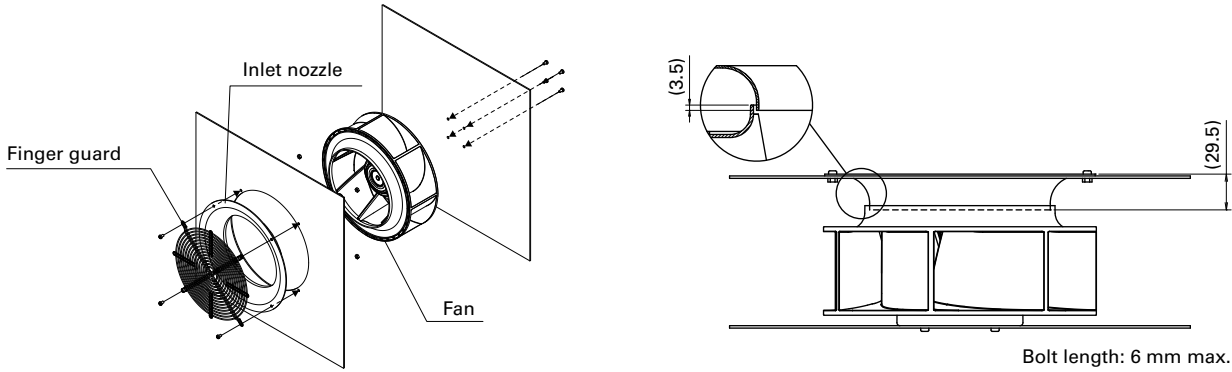

**Options**

Finger guards page: p. 567

Model no.: 109-1137, 109-1137H

Inlet nozzle page: p. 569

Model no.: 109-1134, 109-1134H

# 270×270×99 mm

**San Ace C221 9B1TP** type   **US**


## General Specifications

- Material ..... Motor case: Aluminum (Black coating), Impeller: Plastic (Flammability: UL 94V-0)  
Bracket: Aluminum, Plastic (Flammability: UL 94V-0)
- Expected life ..... See the table below. (L10 life: 90% survival rate for continuous operation in free air at 60°C, rated voltage)  
Expected life at 40°C is for reference only.
- Motor protection function ..... Locked rotor burnout protection, Reverse polarity protection  
For details, please refer to p. 580.
- Dielectric strength ..... 50/60 Hz, 500 VAC, for 1 minute (between lead wire conductors and bracket)
- Insulation resistance ..... 10 MΩ min. at 500 VDC (between lead wire conductors and bracket)
- Sound pressure level (SPL) ..... A-weighted sound pressure level (SPL) at 1 m away from the air inlet.
- Storage temperature ..... -30 to +70°C (Non-condensing)
- Lead wire ..... ⊕Red ⊖Black Sensor Yellow Control Brown
- Mass ..... 1700 g

## Specifications

The models listed below **have pulse sensors with PWM control function.**

| Model no.     | Rated voltage<br>[V] | Operating voltage range<br>[V] | PWM duty<br>cycle <sup>1</sup> [%] | Rated current<br>[A] | Rated input<br>[W] | Rated speed<br>[min <sup>-1</sup> ] | Max. airflow<br>[m³/min] [CFM] |     | Max. static pressure<br>[Pa] [inchH <sub>2</sub> O] |      | SPL<br>[dB (A)] | Operating temperature<br>[°C] | Expected life<br>[h]       |
|---------------|----------------------|--------------------------------|------------------------------------|----------------------|--------------------|-------------------------------------|--------------------------------|-----|-----------------------------------------------------|------|-----------------|-------------------------------|----------------------------|
| 9B1TP24P0H001 | 24                   | 16 to 36                       | 100                                | 3.2                  | 76.8               | 3050                                | 17.6                           | 622 | 530                                                 | 2.13 | 71              | -20 to +70                    | 40000/60°C<br>(70000/40°C) |
|               |                      |                                | 15                                 | 0.4                  | 9.6                | 1000                                | 5.75                           | 203 | 57.4                                                | 0.23 | 53              |                               |                            |
| 9B1TP48P0G001 | 48                   | 36 to 72                       | 100                                | 2.75                 | 132                | 3650                                | 21.0                           | 742 | 760                                                 | 3.05 | 74              | -20 to +60                    |                            |
|               |                      |                                | 15                                 | 0.2                  | 9.6                | 1000                                | 5.75                           | 203 | 57.4                                                | 0.23 | 53              |                               |                            |
| 9B1TP48P0H001 |                      |                                | 100                                | 1.6                  | 76.8               | 3050                                | 17.6                           | 622 | 530                                                 | 2.13 | 71              | -20 to +70                    |                            |
|               |                      |                                |                                    |                      |                    |                                     |                                |     |                                                     |      |                 |                               |                            |


\* PWM frequency is 25 kHz. Models without ratings for 0% PWM duty cycle have zero speed at 0%. When control terminal is open, speed is the same as at 100% duty cycle.

Note: Max input of 9B1TP24P0H001/9B1TP48P0H001: 160 W, 9B1TP48P0G001: 280 W at rated voltage.


## Airflow - Static Pressure Characteristics / PWM Duty - Speed Characteristics Example

**9B1TP24P0H001** With pulse sensor with PWM control function


PWM duty cycle

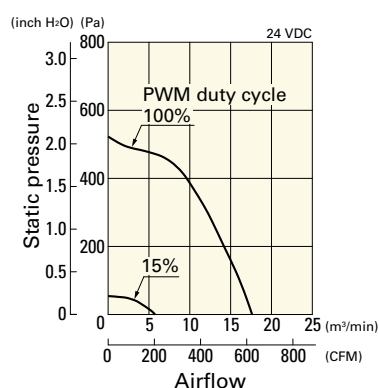

Operating voltage range

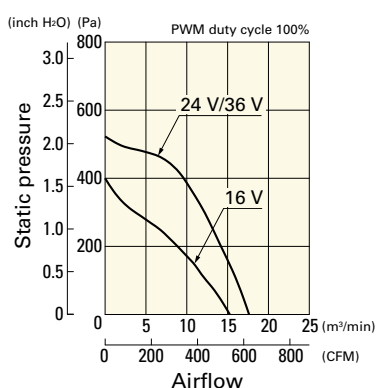


PWM duty - Speed characteristics example

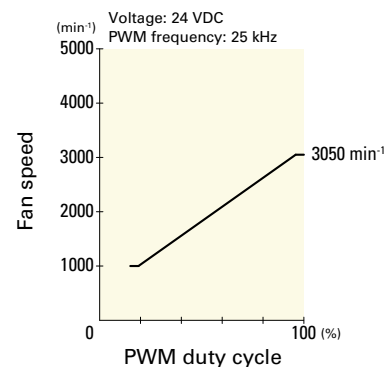


## Airflow - Static Pressure Characteristics / PWM Duty - Speed Characteristics Example

**9B1TP48P0G001** With pulse sensor with PWM control function


PWM duty cycle

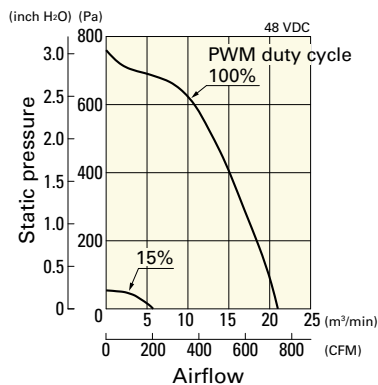

Operating voltage range

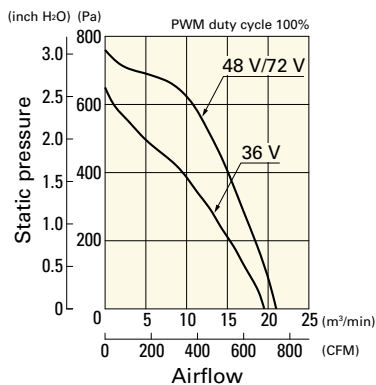


PWM duty - Speed characteristics example

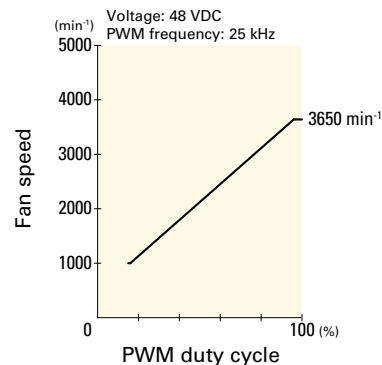


**9B1TP48P0H001** With pulse sensor with PWM control function


PWM duty cycle

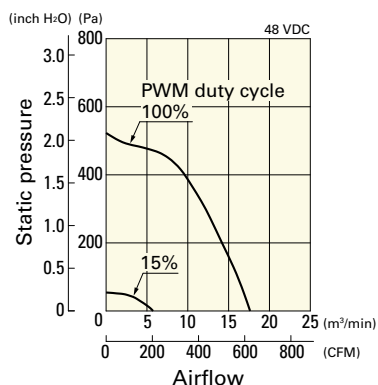




Operating voltage range

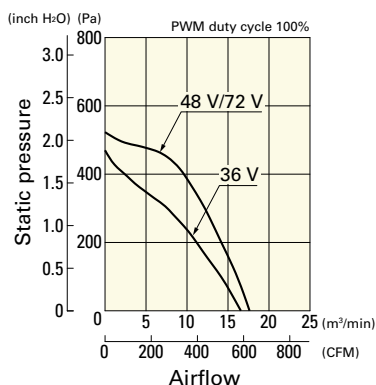


PWM duty - Speed characteristics example

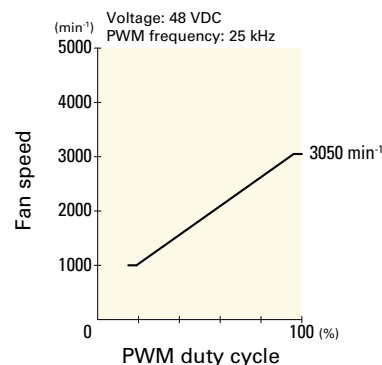

## Dimensions (unit: mm)

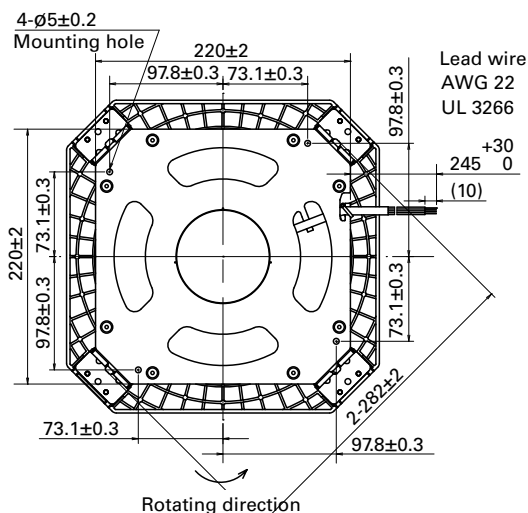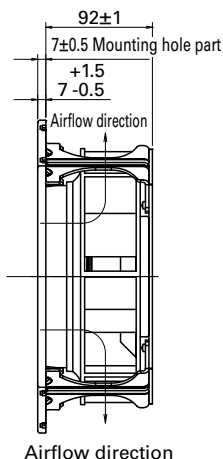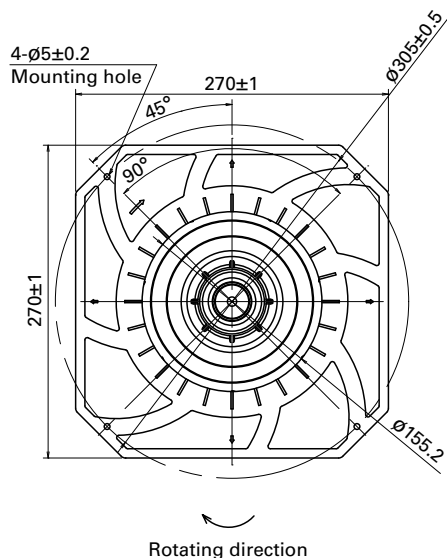


## Reference Dimensions of Mounting Holes and Vent Opening (unit: mm)

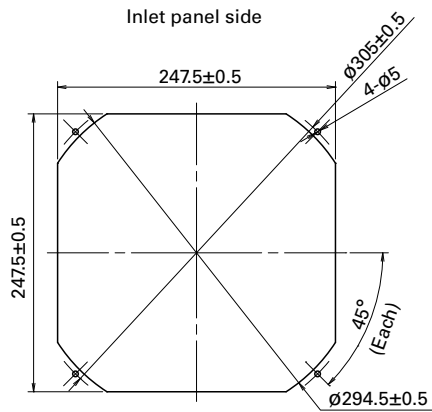

## Reference Diagram for Mounting

Finger guard 109-1146 and 109-1146H should be mounted with four holes as in the drawing.

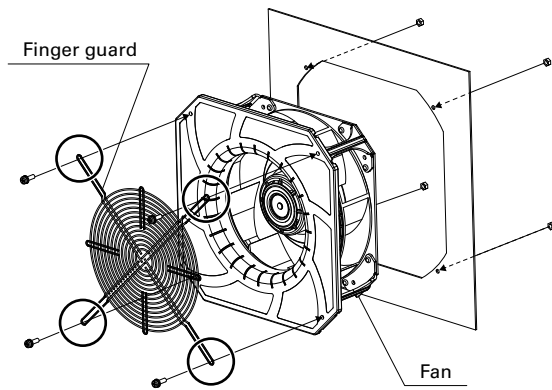

## Options


Finger guards

page: p. 568

Model no.: 109-1146, 109-1146H

# 270×270×119 mm

San Ace C225 9B1TS type 



## General Specifications

- Material ..... Motor case: Aluminum (Black coating), Impeller: Plastic (Flammability: UL 94V-0)  
Bracket: Aluminum, Plastic (Flammability: UL 94V-0)
- Expected life ..... See the table below. (L10 life: 90% survival rate for continuous operation in free air at 60°C, rated voltage)  
Expected life at 40°C is for reference only.
- Motor protection function ..... Locked rotor burnout protection, Reverse polarity protection  
For details, please refer to p. 580.
- Dielectric strength ..... 50/60 Hz, 500 VAC, for 1 minute (between lead wire conductors and bracket)
- Insulation resistance ..... 10 MΩ min. at 500 VDC (between lead wire conductors and bracket)
- Sound pressure level (SPL) ..... A-weighted sound pressure level (SPL) at 1 m away from the air inlet.
- Storage temperature ..... -30 to +70°C (Non-condensing)
- Lead wire ..... ⊕Red ⊖Black Sensor Yellow Control Brown
- Mass ..... 1920 g

## Specifications

The models listed below **have pulse sensors with PWM control function.**

| Model no.     | Rated voltage<br>[V] | Operating voltage range<br>[V] | PWM duty<br>cycle* [%] | Rated current<br>[A] | Rated input<br>[W] | Rated speed<br>[min <sup>-1</sup> ] | Max. airflow<br>[m³/min] [CFM] |      | Max. static pressure<br>[Pa] [inchH <sub>2</sub> O] |      | SPL<br>[dB (A)] | Operating temperature<br>[°C] | Expected life<br>[h]       |
|---------------|----------------------|--------------------------------|------------------------|----------------------|--------------------|-------------------------------------|--------------------------------|------|-----------------------------------------------------|------|-----------------|-------------------------------|----------------------------|
| 9B1TS48P0G001 | 48                   | 36 to 72                       | 100                    | 3.65                 | 175.2              | 3550                                | 28.1                           | 992  | 861                                                 | 3.46 | 74.5            | -20 to +60                    | 40000/60°C<br>(70000/40°C) |
| 15            |                      |                                | 0.24                   | 11.5                 | 1000               | 7.85                                | 277                            | 68.5 | 0.28                                                | 52.0 |                 |                               |                            |
| 9B1TS48P0H001 |                      |                                | 100                    | 2.08                 | 99.8               | 2900                                | 22.7                           | 802  | 590                                                 | 2.37 | 70.5            | -20 to +70                    |                            |
| 15            |                      |                                | 0.24                   | 11.5                 | 1000               | 7.85                                | 277                            | 68.5 | 0.28                                                | 52.0 |                 |                               |                            |


\* PWM frequency is 25 kHz. Models without ratings for 0% PWM duty cycle have zero speed at 0%. When control terminal is open, speed is the same as at 100% duty cycle.

Note: Max input of 9B1TS48P0G001: 380 W, 9B1TS48P0H001: 200 W at rated voltage.


## Airflow - Static Pressure Characteristics / PWM Duty - Speed Characteristics Example

**9B1TS48P0G001** With pulse sensor with PWM control function


PWM duty cycle

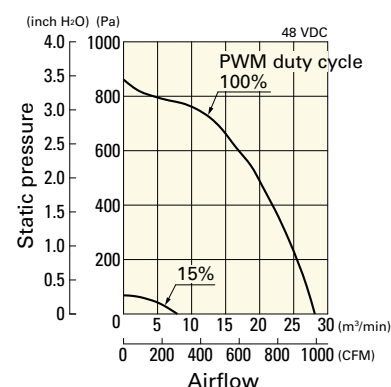

Operating voltage range

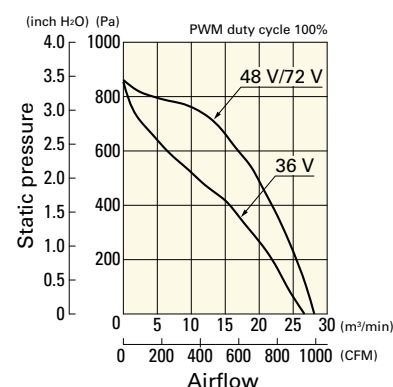


PWM duty - Speed characteristics example

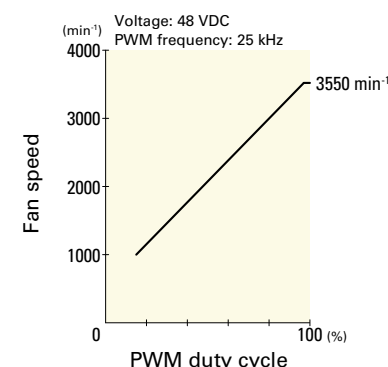


## Airflow - Static Pressure Characteristics / PWM Duty - Speed Characteristics Example

**9B1TS48P0H001** With pulse sensor with PWM control function


PWM duty cycle

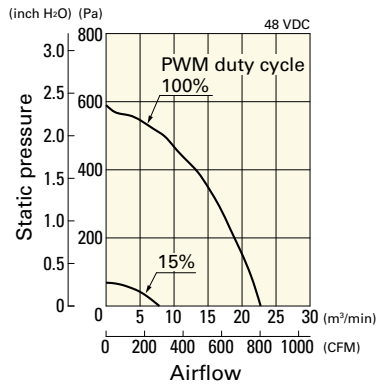


Operating voltage range

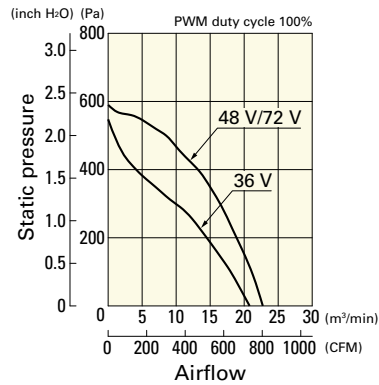


PWM duty - Speed characteristics example

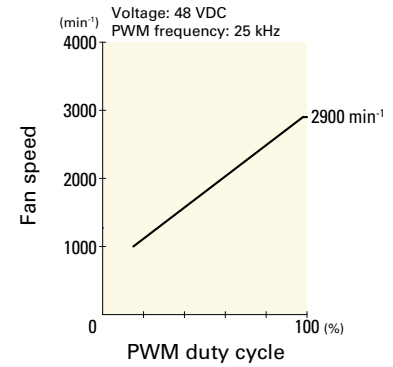

## Dimensions (unit: mm)

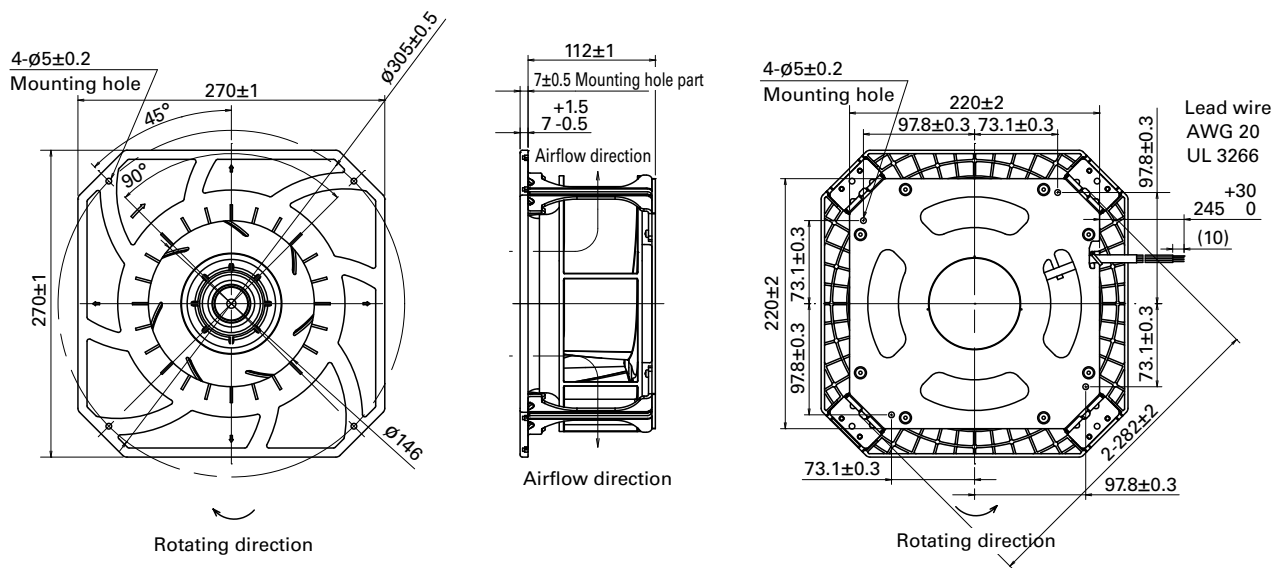


## Reference Dimensions of Mounting Holes and Vent Opening (unit: mm)

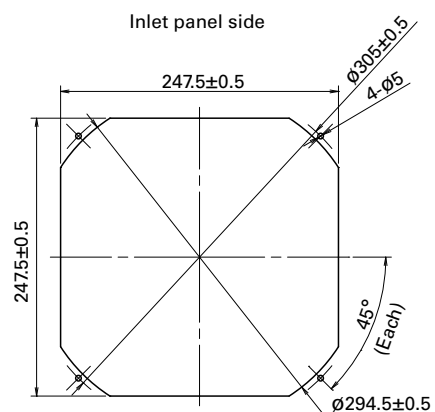

DC  
Centrifugal Fan 270 mm sq.

## Reference Diagram for Mounting

Finger guard 109-1146 and 109-1146H should be mounted with four holes as in the drawing.

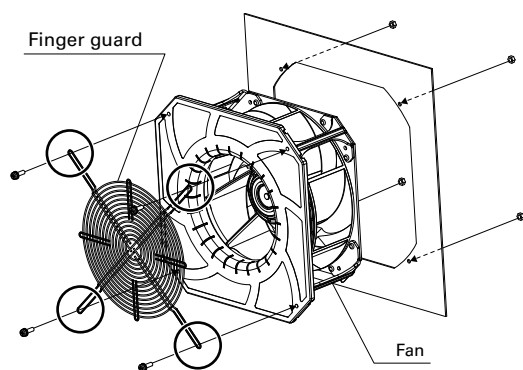

## Options

Finger guards

page: p. 568

Model no.: 109-1146, 109-1146H